

Motosel Full Synthetic ATF WS is a synthetic energy saving fluid for automatic transmissions of the latest generation. Specially developed for step-type / sequential automatic transmissions with hydraulic torque converter of cars, vans, off road vehicles and light trucks, including automatic transmission with manual gear shift function.


- For applications where MERCON V / AISIN WARNER AW1 / HONDA ATF Z1 / HYUNDAI SPII, SPIII, NWS-9638 / VW/AUDI G-055025-A2 / G-052162-A1 / G-052990 / BMW – 7045E, LA2634, LT71141 / CHRYSLER MOPAR ATF3+ / ATF 4+ / FORD MERCON LV / DEXTRON – II, IID, IIE, IIIG, IIIH, VI, VI+ / KIA, MITSUBISHI – SPII, SPIII, RED 1 / MAZDA ATF MIII, ATF MV / MERCEDES BENZ – MB236.1, 236.2, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.12, 236.14, 236.41 / NISSAN MATIC D, J, K, S / SUBARU ATF5, ATFHP / TOYOTA D-II, D-III T-III, T-IV, T-WS specifications are recommended.

Benefits and Applications

- Full synthetic maximum corrosion, wear, and rust protection
- Outstanding low temperature flow properties
- Enhanced friction additives and oxidation stability for longer fluid life
- Smooth shifting and reduce shudder performance
- High compatibility - suitable for use in most applications

TOYOTA Formulation:

for applications where Toyota ATF D-II, ATF D-III, ATF T-III, and ATF T-IV specifications are recommended.

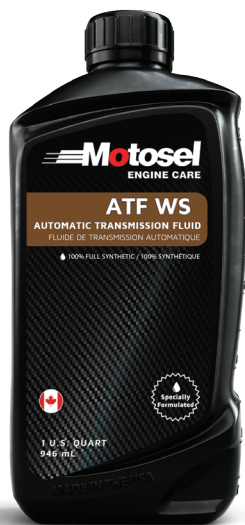

#4011M / 1Qt

TYPICAL CHARACTERISTICS - ATF WS

SAE GRADE	TEST METHOD	ATF WS
Colour	Visual	Red
Viscosity @ 100°C, cSt	ASTMD 445	7.0
Viscosity @ 40°C, cSt	ASTMD 445	32.9
Viscosity Index	ASTMD 2270	180
Pour Point, °C/°F	ASTMD 97	-51/ -59.8
Flash Point, COC °C/°F	ASTMD 92	204 / 399.2
API Gravity	ASTMD 1298	32.6
Brookfield Vis.cP @ -40°C	ASTMD 2983	16200

Typical test data are average values only. Minor variations, which do not affect performance, may occur. You should consult your owner's manual to verify proper fluid recommendation for your particular vehicle.

HANDLING AND SAFETY INFORMATION - Refer to MOTOSEL (SDS) Safety Data Sheets for proper handling and safety information. Use the same care and handling as for any petroleum product. Nothing herein shall be deemed to constitute a warranty, express or implied, that said information or data are correct or that the products described are merchantable or fit for a particular purpose, or that said information, data or products can be used without infringing patents of third parties.